

A close-up photograph of a red leather sewing kit. The kit is open, revealing various sewing tools including a pair of silver-handled scissors, a red-handled seam ripper, a silver buttonhole foot, a silver button, a silver thimble, and a silver needle. The kit is filled with spools of thread, including a large spool of blue thread labeled "COATS & CLARK'S" and "HEAVY DUTY SEWING", and a smaller spool of orange thread labeled "CO. AMERICAN". The text "Clothing Repair" is overlaid in a large, orange, stylized font with a white outline.

Clothing Repair

General Materials


- Needle
- Non-shiny Thread*
- Sewing Machine (optional)
- Scrap Material

*We recommend using Gütermann Thread, not Embroidery Thread

Repairs Covered

- Sewing on a Button
- Darning a Sock
- Repairing Holes in Jeans
- Sewing a hem
 - Blind hem (by hand)
 - Double-fold (by machine)

Sewing on a Button

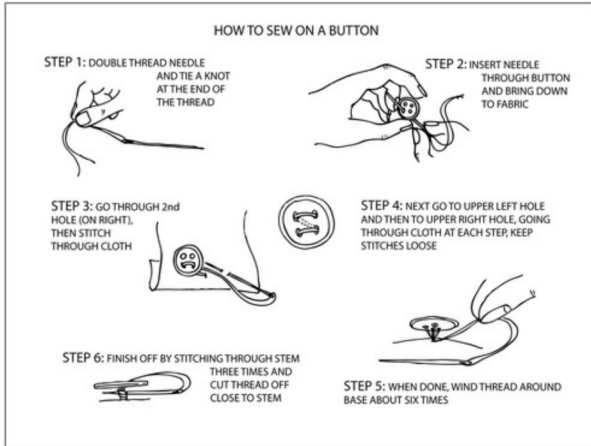


- Double thread needle and tie a knot at the end of the thread
- Insert needle through button and bring down to fabric
- Go through hole on the right then stitch through cloth
- Go to upper left hole and then to upper right, going through the cloth at each step, keep stitches loose
- When finished, wind thread around base about six times
- Finish off by stitching through the stem 3 times and cut thread close to stem

Darning a Sock

You can think of darning as weaving!


D A R N I N G A H O L E

First clear the loops of fluff and broken ends of threads from knitted garments or clip away ragged edges from machine knit fabrics. Always use a darning ball under large holes.

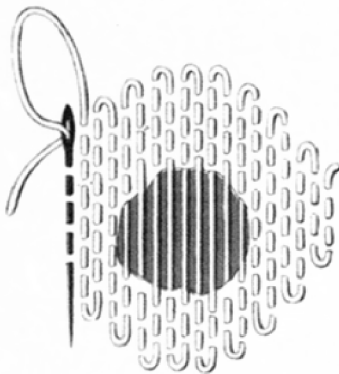


1. Make the darn the shape of the hole.
2. Darn up and down the hole first ; work on the wrong side.
3. Choose mending as fine as the material of the garment.
4. Begin a good distance away from the hole in order to reinforce the thin parts round the hole.
5. Space the rows of darning the width of a strand of mending apart.
6. Pick up the backs of the loops only unless the material is very fine.
7. Leave loops at the ends of each row and darn so that stitches alternate with spaces between stitches in the previous rows.
8. Pick up the edge of the hole in one row then go over the edge of the hole in the next row. If you have cleared the edges of the hole you will find this will be easy and will make a neater mend on the right side of the garment.
9. Continue the darn over the thin place beyond the hole.

Darning over the first rows of darning



1. Darn over the hole only and about two stitches of darning beyond.
2. Leave loops at the ends of each row, and only pick up on the needle the darning stitches.
3. Pick up the alternate strands of mending in first row.
4. In alternate rows, pick up the strands of mending you passed over in the previous row.

Repair Holes in Jeans

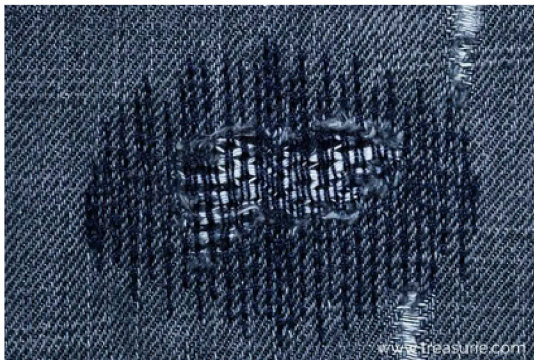


Repair Holes in Jeans

- Trim the frayed edges of the hole
- Turn the jeans inside out. Take a scrap piece of denim that matches the wash and place it face down over the hole
- Use a basting stitch (long stitch length, don't backstitch at the beginning or end) to hold patch in place
- Flip the jeans so the right side is facing out, change the thread color of the sewing machine to match the jeans and use a straight stitch to go back and forth to mimic the threads of the jeans.
- Remove the basting stitch carefully once you have finished


Blind Hem (By Hand)

STEP THREE: Insert needle with thread into the hem of your garment (upwards into the fold to hide your knot) while folding the hem over twice for a clean finished look. Use pins to keep in place!

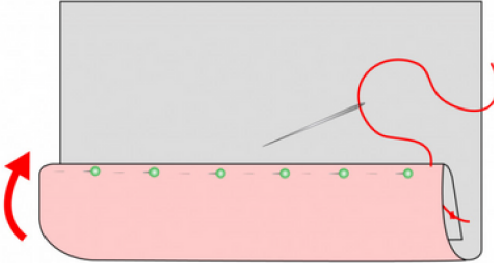


inad

STEP FOUR: Take a piece of thread from the wrong side, typically 1-2 threads should be enough, and pull towards you to tighten the thread.

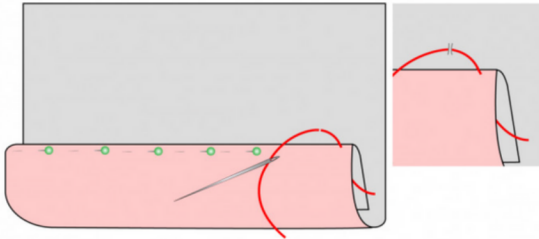


inad

STEP FIVE: Reinsert the needle into the fold, and push the needle out once more from the fold! Your stitch pattern should begin to look like upside down "V's".

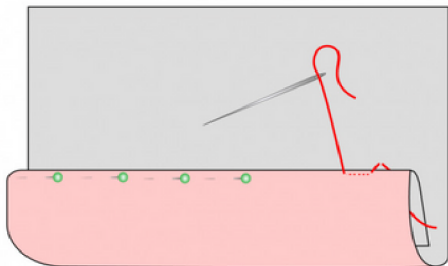


msc01

STEP SIX: Repeat steps 4-5 until you reach the end of your hem, where you would like to stop. In order to hide you knot, tie your thread into the loop of your last stitch.

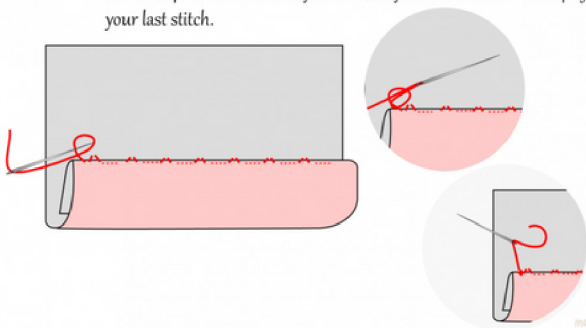

msc01

Double-Fold Hem (by Machine)

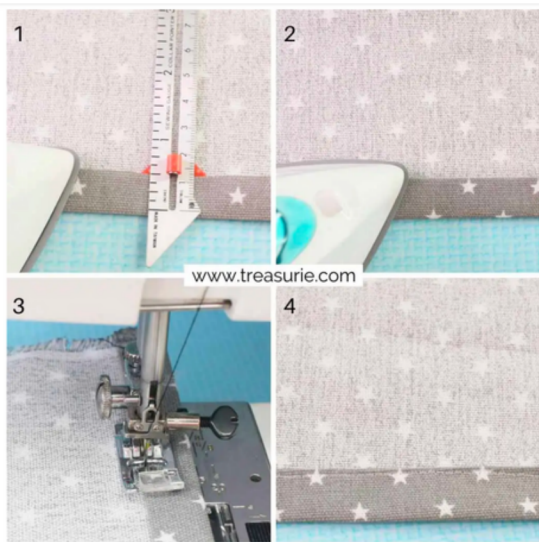

- Flip fabric so the wrong side is facing up
- Make the first fold and press with an iron, you can either press equally or unequally depending on preference
- Make second fold and press with iron
- Sew using a straight stitch along the top of the fold (as seen above)

Resources for Repairing




- Mood Fabrics Blog (beginner sewing) has a lot of tutorials on hand and machine sewing.
- *The Art of Repair: Mindful Mending, how to stitch old things to new life* by Molly Martin

'A beautiful, honest, fascinating book, which celebrates slow living and the real worth of things.' **Lindsay Duncan**

THE ART OF REPAIR



Mindful mending:
how to stitch old
things to new life



Molly Martin

A photograph of various sewing supplies. In the foreground, a red leather sewing kit is open, revealing a pair of silver-handled scissors, a silver seam ripper, a silver buttonhole foot, and several metal bobbins. To the right, three spools of thread are stacked vertically: a blue spool on top, a light blue spool in the middle, and a peach-colored spool at the bottom. The spools are labeled 'COATS & CLARK' and 'AMERICAN THREAD CO.'. The background is a wooden surface.

Spring 2023 Repair Workshop Series



Design Center

BARNARD COLLEGE